

# KUBOTA DIESEL TRAM

## TKU22

Kubota RTV-X 1100

Clean Diesel

Hydrostatic Transmission

22 Seats (No ADA Access)

20 Seats (W/ ADA Access)

---


**\$65,000 USD + shipping**

**Specifications on page 2**

---



Cargo luggage box behind driver.  
Coaches are aluminum & galvanized  
with powder coated frame. ADA  
Access Option.

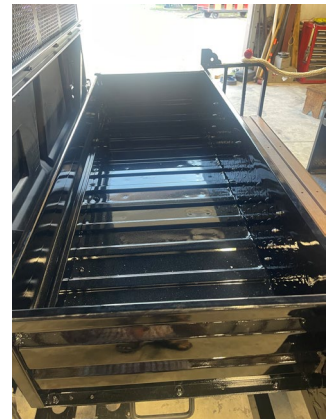

# SPECIFICATIONS

| Model name                       |                                     |  | RTV-X                                                                                      |                |         |
|----------------------------------|-------------------------------------|--|--------------------------------------------------------------------------------------------|----------------|---------|
| Grade                            |                                     |  | Basic                                                                                      | Standard       | Premium |
| Color                            |                                     |  |                                                                                            |                |         |
| Engine                           | Make and model                      |  | KUBOTA D1105-E4-UV                                                                         |                |         |
|                                  | Type                                |  | 3-cylinders, 4-cycle, diesel, OHV                                                          |                |         |
|                                  | Displacement cu.in (cc)             |  | 68.5 (1,123)                                                                               |                |         |
|                                  | Horsepower HP (kW) / rpm            |  | 24.8 (18.5) @3000                                                                          |                |         |
|                                  | Cooling system                      |  | Liquid                                                                                     |                |         |
|                                  | Battery                             |  | 670 CCA                                                                                    |                |         |
| Transmission                     |                                     |  | Variable hydro transmission (VHT-X)                                                        |                |         |
| Gear selection                   |                                     |  | Hi-Lo range forward, neutral, reverse                                                      |                |         |
| Max. traveling speed mph (km/h)  |                                     |  | 0-25 (0-40)                                                                                |                |         |
|                                  | Front differential                  |  | Limited-slip differential                                                                  |                |         |
|                                  |                                     |  |                                                                                            |                |         |
| Steering                         |                                     |  | Hydrostatic power steering                                                                 |                |         |
| Brakes                           | Front /                             |  | Wet-disk brakes                                                                            |                |         |
|                                  | Parking brake                       |  | Rear wheel, hand operated                                                                  |                |         |
| Suspension                       | Front                               |  | Independent, Dual A-arms with adjustable spring preload / Independent with coil over shock |                |         |
|                                  | Front suspension travel in. (mm)    |  | 8 (205) / 8 (205)                                                                          |                |         |
| Ground clearance                 | Front in. (mm)                      |  | 10.5 (266)                                                                                 |                |         |
|                                  | Rear in. (mm)                       |  | 10.4 (263)                                                                                 |                |         |
| Headlights                       |                                     |  | LED (Low)                                                                                  | LED (High/Low) |         |
| Occupant Protective System (OPS) | Tubular overhead structure in. (mm) |  | 2.0 (50.8) steel tube                                                                      |                |         |
|                                  | Seat belts                          |  | 2-point                                                                                    |                |         |
|                                  | Certification                       |  | SAE J2194 and OSHA 1928 ROPS                                                               |                |         |
| Dimensions                       | Length in. (mm)                     |  | 252 inch 640mm                                                                             |                |         |
|                                  | Width in. (mm)                      |  | 63.2 (1,605)                                                                               |                |         |
|                                  | Height, overall in. (mm)            |  | 79.5 (2,020)                                                                               |                |         |
|                                  | Front tread centers in. (mm)        |  | 48.8 (1,240)                                                                               |                |         |
|                                  |                                     |  |                                                                                            |                |         |
|                                  |                                     |  |                                                                                            |                |         |